



Built-in, commercial overflow spas should be standard in all hotels and public areas.


The Oasis 20 overflow spa, with a diameter of 2.5 metres, is an original spa covered in glass mosaic tiles that will add a different and bold touch to your wellness area.

Overflow spas can be used privately, as well as commercially, as they provide full comfort thanks to their continuous water level and ease of installation.

COMMERCIAL RANGE

OASIS 20



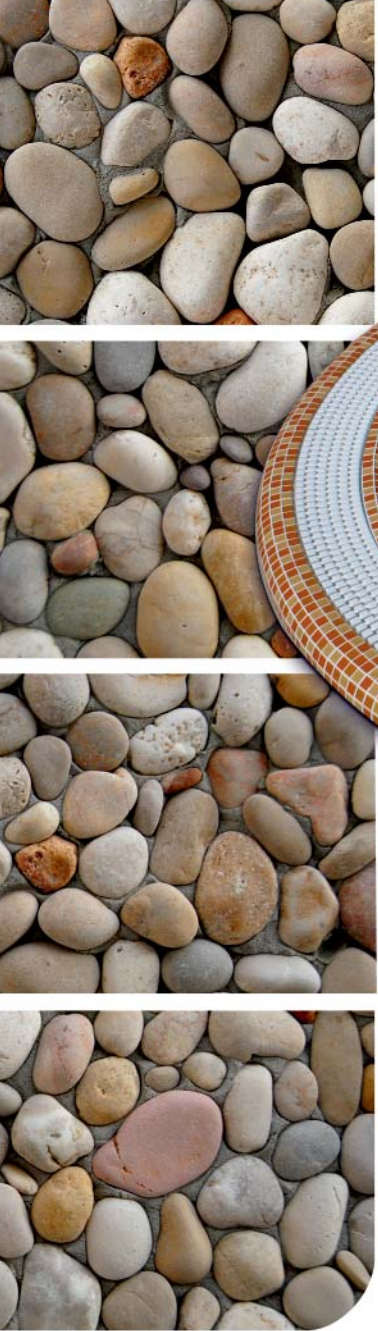

COMMERCIAL RANGE

OASIS 20

General Specifications	
Dimensions	Ø 250 (± 1cm)
Positions (Seats / Loungers)	6 (6 / -)
Water capacity (Litre)	1.410 l.
Recommended water tank (Litre)	1.000 l., 1610 x 1210 x 840 cm
Empty spa weight / Full spa weight	340 Kg. / 1.750 Kg
Material	Vitreous mosaic

Features	
Jets	8
Air nozzles	12
Metallic structure	Yes
Light	Yes
Piezoelectric switches	2
Overflow	Yes

Options	
Insulated cover	Optional

Compact Kit	Kit 75
Filter	Ø 650
Filtration Pump	0,82 KW
Massage Pumps	1,4 KW
Air Blower	1,3 KW
Standard heater power	6 KW
Buttons / Control	Piezoelectric
Power requirement Low Amp (W)	9.582W
Power requirement (A)	19,2 A
Voltage	400 V III
Electric heater control	Yes
Ozonater	Optional
Electrolysis automatic disinfectant	Optional



We reserve the right to modify the characteristics of our products without prior notice.