


Built-in, commercial overflow spas should be standard in all hotels and public areas.

The Bali overflow spa, with a diameter of 3 metres, owes its comfort to its two levels and is thus able to meet the needs of the most demanding clients. This spa is designed to comfortably seat 9 people, who will enjoy the benefits of a wide variety of massage systems.

Overflow spas can be used privately, as well as commercially, as they provide full comfort thanks to their continuous water level and ease of installation.

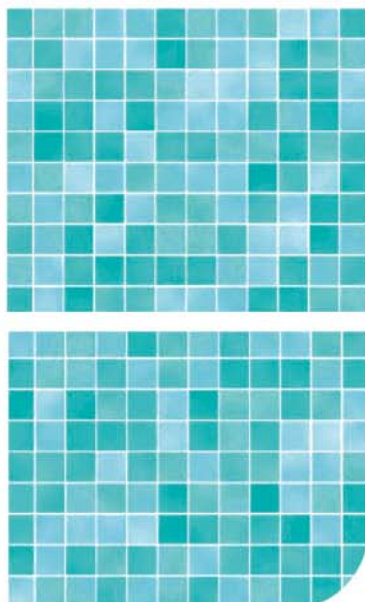


## COMMERCIAL RANGE • BALI



# COMMERCIAL RANGE

## BALI

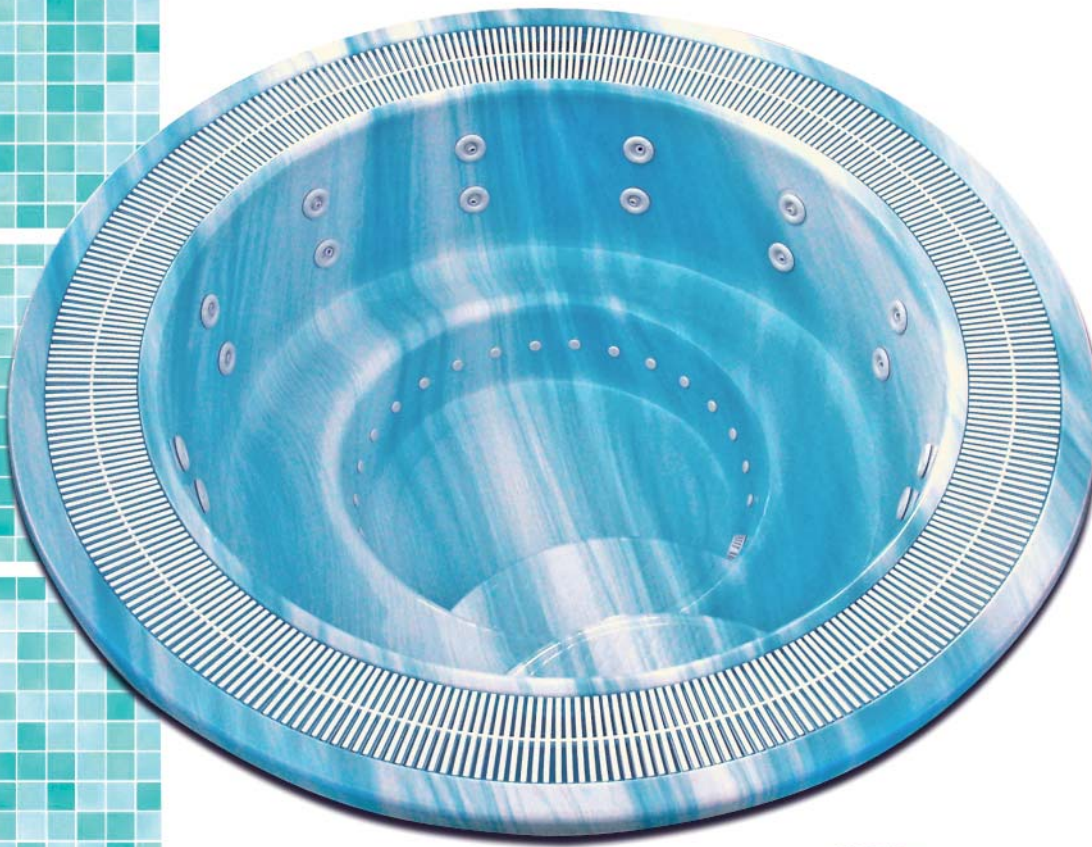

General Specifications	
Dimensions	Ø 300 (± 1cm)
Positions (Seats / Loungers)	9 (9 / -)
Water capacity (Litre)	2.290 l.
Recommended water tank (Litre)	2.000 l., 2060 x 1600 x 840 cm
Empty spa weight / Full spa weight	310 Kg. / 2.600 Kg
Material	Acrylic (White or Blue Marble)

Features	
Jets	18
Air nozzles	18
Metallic structure	Yes
Light	Yes
Piezoelectric switches	2
Overflow	Yes

Options	
Insulated cover	Optional
Stainless steel jets	Optional
Chromotherapy LED	Optional

Compact Kit	Kit 75 2M
Filter	Ø 650
Filtration Pump	0,82 KW
Massage Pumps	2 x 1,81 KW
Air Blower	1,3 KW
Standard heater power	6 KW
Buttons / Control	Piezoelectric
Power requirement Low Amp (W)	11.802W
Power requirement (A)	23 A
Voltage	400 V III
Electric heater control	Yes
Ozonater	Optional
Electrolysis automatic disinfectant	Optional



We reserve the right to modify the characteristics of our products without prior notice.